


STEREOVIEW 3D 2.8 / 2.5 / 2.2

3D SILVER SCREEN

STEREOVIEW silver screens are the ultimate standard surface for 3D viewing. The best signal-to-noise ratio in the industry ensures a sharp, crystal clear image. The screen coating is developed with enhanced durability for easy installation and improved longevity. Available in three different gain options to meet the operational demands of any venue. This silver screen also amps up 2D showings, making it a versatile and adaptable material.

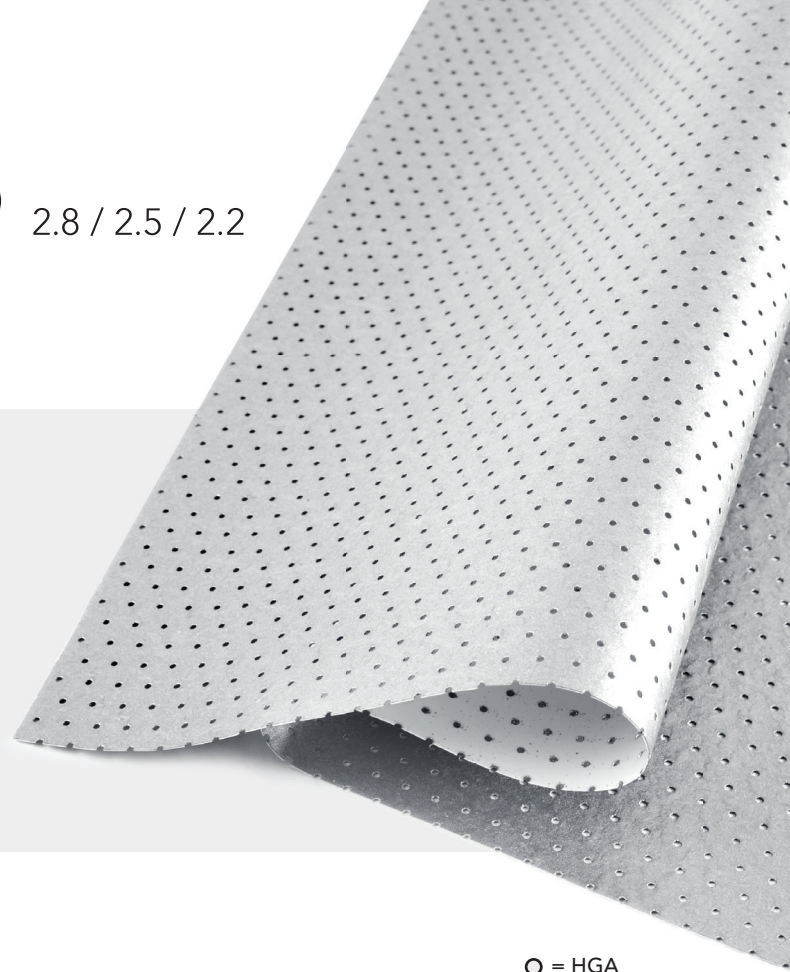

TECHNICAL SPECIFICATIONS	
Gain	2.8 / 2.5 / 2.2 (± 5% on-axis) more gain options available upon request
Signal to noise ratio	270+ / 250+ / 200+
Perforation options	Non-perforated, Standard (4.5% void) and Micro (3.5% void)
Surface	Textured PVC with High Gain Aluminum Coating
Material width	54" – 1,4 m
Thickness	Approx. 15.5 mil – 0,39 mm
Weight	Approx. 0.1 lb/ft ² - 488 g/m ² (with standard perforation)
Fire retardancy	NFPA-701, M3, B1 <i>Please contact us for additional certification requirements.</i>
Edging	PVC grommets every 9 inches center to center. Pipe pockets, velcro, snaps and other edging options available upon request
Packaging	Rolled on a cardboard tube and inserted into a highly resistant carton or box

