


CINELIFE IMB SOLUTION

Alternative content | Content management and storage | Post production

Fully-integrated media block for content playback, scheduling, and management with simplified interface



Simplified playback, scheduling, and management of cinema content with advanced processing capabilities



Key features:

- › **Easy to update** – integrated software architecture ensures safe and fully tested software upgrades
- › **Easy to install** – pre-configured out of the box for plug and play setup
- › **Easy to operate** – UX-designed interface on an intuitive platform for managing content and playback schedules
- › **Dedicated support** – projection system backed by a single technical support team
- › **Ready to play** – Secure system for DCP playback of feature content, advertising, and alternative content



Specifications

IMB-S3

| | |
|-------------------|--|
| System Interfaces | <ul style="list-style-type: none"> • 3 x Gigabit Ethernet - (1GBE/RJ-45) • 1 x eSATA/ USB 2.0 combo • 1 x USB 3.0 (Type A female) • 2 x HDMI 1.4a (alternative content input) • 4 x GPI, 4 x GPO • 3 x BNC (Genlock, Sync Out, LTC Out) |
| Audio Output | <ul style="list-style-type: none"> • 16/24-bit AES 16-channel, 48/96 kHz (2 x RJ-45) |
| DCP Playback | <ul style="list-style-type: none"> • DCI compliant • JPEG 2000 • 2K - 24, 25, 30, 48, 50, 60, 120 (2D) • 2K - 24, 25, 30, 48, 50, 60 (3D) • 4K - 24, 25, 30 (2D) • MPEG-2 (DCP) • SMPTE Digital Cinema Package (DCP), Interop DCP |
| Control | <ul style="list-style-type: none"> • UX-designed SMS integrated with projector TPC • VNC remote access |


Specifications

NAS-S3

| | |
|---------|---|
| Storage | <ul style="list-style-type: none"> • 4 x 2TB hard drives¹ |
|---------|---|

¹ RAID 5 configuration would provide 5.5TB of usable space. For additional storage, hard drives can be replaced with larger capacity drives.

Christie IMB-S3

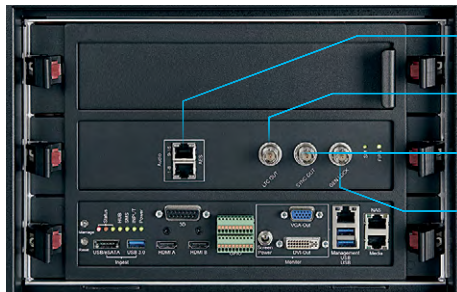

- 1 AES 16 channel audio, dual RJ45 connectors with audio channel remapping capability
- 2 LTC – Linear Time Code Output, 75ohm BNC
- 3 Sync Out, 75ohm BNC (for multi-projector sync)
- 4 Sync In, 75ohm BNC (for multi-projector sync)

Christie NAS-S3



- 5 ETH1 pre-configured for IMB-S3
- 6 HDMI 1.4b
- 7 Gigabit Ethernet x 4
- 8 USB 3.0 x 4
- 9 Dual 250W power supplies

Corporate offices

Christie Digital Systems USA, Inc.
Cypress
ph: 714 236 8610
Christie Digital Systems Canada Inc.
Kitchener
ph: 519 744 8005

Worldwide offices

Australia
ph: +61 (0) 7 3624 4888
Brazil
ph: +55 (11) 94988 8843
China (Beijing)
ph: +86 10 6561 0240
China (Shanghai)
ph: +86 21 6030 0500
Colombia
ph: +57 (318) 477-3179

Eastern Europe
ph: +36 (0)1 47 48 138
Germany
ph: +49 221 99 512-0
India
ph: +91 (080) 6708 9999
Mexico
ph: +52 55 4744 1790
Singapore
ph: +65 6877 8790

South Korea
ph: +82 2 702 1601
Spain
ph: +34 91 633 9990
United Arab Emirates
ph: +971 (0) 4 503 6800
United Kingdom
ph: +44 (0)118 977 8000
United States (Arizona)
ph: 602 943 5700

Independent sales consultant offices

Italy
ph: +39 (0) 2 9902 1161
Russia
ph: +7 (495) 136 62 43

For the most current specification information, please visit christiedigital.com

Copyright 2021 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
CINE0131-IMB-Datasheet-Mar-21-EN-US

