


CP2315-RGB

Small-screen auditoriums | Boutique cinema | Post production | Screening rooms

Advanced, yet affordable, DCI compliant cinema projection featuring Christie RealLaser™ technology for screens up to 58 feet wide



Key features:

- › **Improved cinema experience** – expanded color gamut approaching REC 2020, greater brightness and contrast
- › **Enhanced Wavelength Diversity (EWD)** – utilising MPD technology to improve image quality on all screen types
- › **Long-lasting light source** – over 50,000 hours of optimal performance
- › **Low maintenance** – sealed optics for protection against dust ingress
- › **Backwards compatibility** – works with existing Christie accessories and lense
- › **Best-in-class operational efficiency** – 11.6 lumens per watt

CHRISTIE
RealLaser™

Advanced laser light source for accurate reproduction of DCI content

CineLife™

Integrated screen management system enabling seamless content and booth management with built-in automation controller

DIGITAL CINEMA CONFIGURATOR

Help find the right lens for your projector on our website



Specifications

Christie CP2315-RGB


Brightness	nominal	• Up to 15,000 lumens
	lifetime	• >50,000 hours ¹
Contrast ratio		• 3000:1 full field on/off; 1000:1 ANSI with standard high brightness
Digital micromirror device		• 0.98" mDC2K 3-chip DMD DLP Cinema® • 2048x1080 (2K)
Color gamut native gamut		• >95% of Rec 2020 coverage
Processing electronics		• Christie® CineLife™ Series-3 (Series-2 IMB compatible) ² • HDMI v1.4a x2 • 16-channel AES (w/ Christie IMB-S3 via RJ45 x2) • 2K120 (w/Christie IMB-S3) • Built-in automation controller • 3D Sync Connector (12V 1A powered) ³
Lens mount configuration		• Fully motorized Intelligent Lens System (ILS™)
Lenses		• 1.05:1 / 1.20-1.75:1 / 1.39-1.9:1 / 1.5-2.2:1 / 1.75-2.4:1 / 1.9-3.0:1 / 2.4-3.9:1
Power input requirements		• Input A: 200-240 VAC @ 50-60Hz, 10A max • Input B (UPS input): 100-240VAC @ 50-60Hz, 10A (8A typical @ 120V)
Cooling		• Liquid pressurized/TEC, self-contained • Heat extraction optional • Room heat load w/o extraction: 5118 BTU/hr"
Power consumption		• 1160W, max DCI brightness, @25°C 3960 BTU/hr
Laser class		• Class 1 – Risk Group 3
Weight		• As installed: 174lbs max (79kg)
Dimensions (w/o lens)		size (LxWxH) • 42.6 x 25.0 x 13.3" (1083 x 635 x 337mm)
Accessories		• Christie IMB-S3 • NAS-S3 5.4TB storage • Rack mount pedestal • Rack mount pedestal adaptor • Extraction duct adaptor

¹ Subject to variables specific to each installation. Please see Christie's laser best practices guide for more information.


² Supports 3rd party IMB models from Dolby, GDC and others. Please contact Christie for updated compatability list.

³ Supports most conventional 3D systems except "color-separation" based 3D (i.e. 4P). Visit the website for more information


Front view




Side view

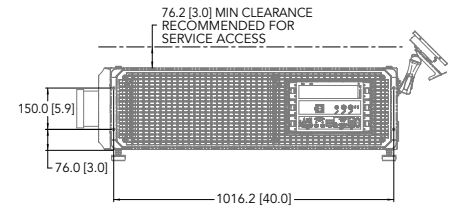

Top view

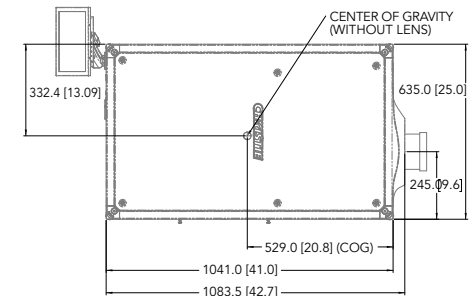

Back view



Corporate offices

Christie Digital Systems USA, Inc.
Cypress
ph: 714 236 8610
Christie Digital Systems Canada Inc.
Kitchener
ph: 519 744 8005

Worldwide offices

Australia
ph: +61 (0) 7 3624 4888
Brazil
ph: +55 (11) 2548 4753
China (Beijing)
ph: +86 10 6561 0240
China (Shanghai)
ph: +86 21 6030 0500
Colombia
ph: +57 (318) 477-3179

Germany
ph: +49 221 99 512-0
India
ph: +91 (080) 6708 9999
Mexico
ph: +52 55 4744 1790
Singapore
ph: +65 6877 8790

South Korea
ph: +82 2 702 1601
Spain
ph: +34 91 633 9990
United Arab Emirates
ph: +971 (0) 4 503 6800
United Kingdom
ph: +44 (0)118 977 8000
United States (Arizona)
ph: 602 943 5700

Independent sales consultant offices

Italy
ph: +39 (0) 2 9902 1161
Russia
ph: +7 (495) 930 8961

For the most current specification information, please visit christiedigital.com

Copyright 2021 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
CD2174_Christie CP2315-RGB_Datasheet_Aug-21_EN



CHRISTIE®